


DC7022

LED Emergency Light Kit

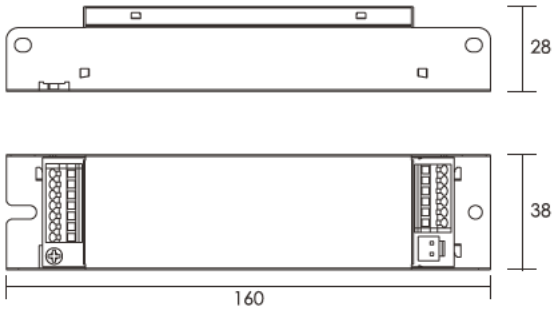


Technical Data	DC7022
技术参数	3000
Rated supply voltage 输入额定电压	220-240V~
Frequency 额定频率	50/60Hz
Input current 输入电流	40mA
Input power 输入功率	4W
Power factor 功率因素	0.5C
Charge current 充电电流	200mA
Recharge hours 充电时间	20h
EM LED current LED 工作电流	400-40mA
EM LED voltage 输出电压	6-60V
EM LED power LED 工作功率	2.4W
Ambient temperature ta 环境温度	-25...+50°C
Max. casing temperature tc 最大外壳温度	70°C
Battery type 电池	Ni-cd 3.6V 3.0Ah
Dimensions LxWxH 尺寸	160x38x28mm
Fixing centre D 安装孔距	150mm

- Intelligent automatic recharging function
- Automatic output current adjustment
- Constant current mode
- Wide range LED voltage 6-60V
- 3 hour emergency operation
- LED charge status display
- Deep discharge protection
- Test switch with self-test function
- Built-in compact design
- Suitable for LED luminaire with external driver




Option

Duration and battery type

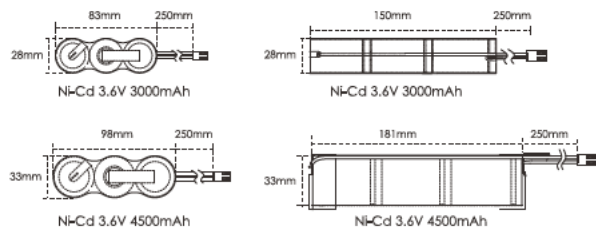

Status Indication LED

Mounting hole 6.5mm dia



Test Switch

Mounting hole 7.0mm dia

