


DC7023

LED Emergency Light Kit

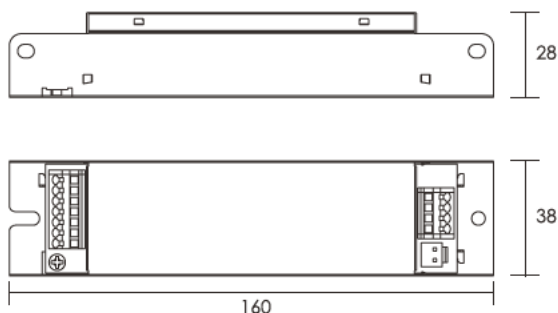


Technical Data	DC7023
技术参数	
Rated supply voltage 输入额定电压	220-240V~
Frequency 额定频率	50/60Hz
Input current 输入电流	50mA
Input power 输入功率	6W
Power factor 功率因素	0.5C
Charge current 充电电流	200mA
Recharge hours 充电时间	16h
EM output voltage 应急输出电压	DC160V
EM power 应急工作功率	50%/100%
Ambient temperature t_a 环境温度	-25...+50°C
Max. casing temperature t_c 最大外壳温度	70°C
Battery type 电池	Ni-Cd 12V 2.5Ah
Dimensions LxWxH 尺寸	160x38x28mm
Fixing centre D 安装孔距	150mm

- Intelligent automatic recharging function
- Suitable for LED lamp with internal driver, e.g. LED bulb: 3-11W; LED tube: T5/T8 8-20W
- Emergency power keep working for 50%/100%
- Constant Voltage mode
- 3 hour emergency operation
- LED charge status display
- Deep discharge protection
- Test switch with self-test function
- Built-in compact design




Option
Battery type

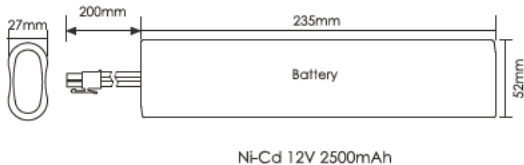

Status Indication LED

Mounting hole 6.5mm dia



Test Switch

Mounting hole 7.0mm dia

